



Laboratorio di Tecnologie dell'Informazione

Ing. Marco Bertini
bertini@dsi.unifi.it
<http://www.dsi.unifi.it/~bertini/>



Coding style guidelines

“Good code is its own best documentation.”
- Steve McConnell





Why using a coding standard ?

- A coding standard may help to reduce errors due to poorly written code, i.e. code that uses programming facilities in (unnecessarily) error-prone way or that expresses ideas in obscure ways
- There's no standard coding standard



Classes and Objects

- Names representing types (i.e. classes) and namespaces must be in mixed case starting with upper case, e.g.:

Line, SavingsAccount

- Variable names must be in mixed case starting with lower case, e.g.:

line, savingsAccount



Classes and Objects - cont.

- Bjarne Stroustrup despises this “camel” coding style and in JSF++ proposes the use of underscores, e.g.:

`number_of_elements, Device_driver`

instead of

`numberOfElements, DeviceDriver`

- Suggestion: pick whatever you like and be consistent



Classes and Objects - cont.

- The parts of a class must be sorted public, protected and private.
- All sections must be identified explicitly.
- Not applicable sections should be left out.



Classes and Objects - cont.

- A class should be declared in a header file and defined in a source file where the name of the files match the name of the class.
- All definitions should reside in source files.

Eclipse CDT let you decide to create the getter/setter as inline methods within the class declaration or in the .cpp file...



Naming a variable

- The name of a variable should describe fully and accurately the entity the variable represents.
- State in words what the variable represents, probably you'll immediately see a good name.
- Do not be cryptic, do not use strange acronyms



Naming a variable: examples

Purpose of the variable	Good name	Bad name
Current Date	currentDate	CD, current, cD
Lines per page	linesPerPage	LPP, lines, l
Running total of checks written to date	runningTotal, checksTotal, numChecks, nChecks	checks, written, checkTTL, x1



The 2 worst variable names

- “data” is a terrible name: every variable contains a data... a variable name should describe what data is contained
- “data2” is another terrible name, like any other `variableX` with $X \in \mathbb{N}$
- rethink what’s the difference w.r.t. `variable` and what it should contain.
Avoid to write code like
`if(total2 < total3)`



Variables

- Declarations shall be declared in the smallest possible scope
 - keeping initialization and use close together minimize chance of confusion;
 - letting a variable go out of scope releases its resources
 - In C++ you can declare a variable wherever you want: do it!
 - Initialize a variable: uninitialized variables are a common source of errors
-



Methods

- Names representing methods or functions must be verbs (followed by an object) and written in mixed case starting with lower case (like Java), e.g.:

`getName()`, `computeTotalWidth()`

- The name of the object is implicit, and should be avoided in a method name, e.g.:

`line.getLength();` // NOT:
`line.getLineLength();`



Methods - cont.

- Use strong verbs, not wishy-washy verbs:
 - OK: `calcMonthlyRevenue()`
 - NO: `handleCalculation()`,
`processInput()`



Attributes

- Private class variables often have underscore suffix, e.g.:

```
class SomeClass {  
    private:  
        int length_  
};
```

- This is **HIGHLY** controversial. Other acceptable approaches are: underscore prefix, m_ prefix, no suffix/prefix (use syntax highlighting of the IDE)



Numbers

- Avoid “magic” numbers, i.e. numbers that appear in code without being explained
- E.g.:

```
for(int i = 0; i < 255; i++)...
```

versus

```
for(int i = 0; i < maxEntries; i++)...
```



Numbers

- Avoid “magic” numbers, i.e. numbers that appear in code without being explained

- E.g.:

```
for(int i = 0; i < 255;
```

versus

```
for(int i = 0; i < maxEntries; i++)...
```

Consider the case in which the number, used through the code, has to be changed...



String

- Avoid “magic” strings as you avoid “magic” numbers. E.g.:

```
if ( inputChar == '\027' )...
```


versus

```
if ( inputChar == ESCAPE )...
```



Layout

- Indent code in a consistent manner
- The Python language even uses indentation for grouping...
- Editors have automatic indentation functions: use them

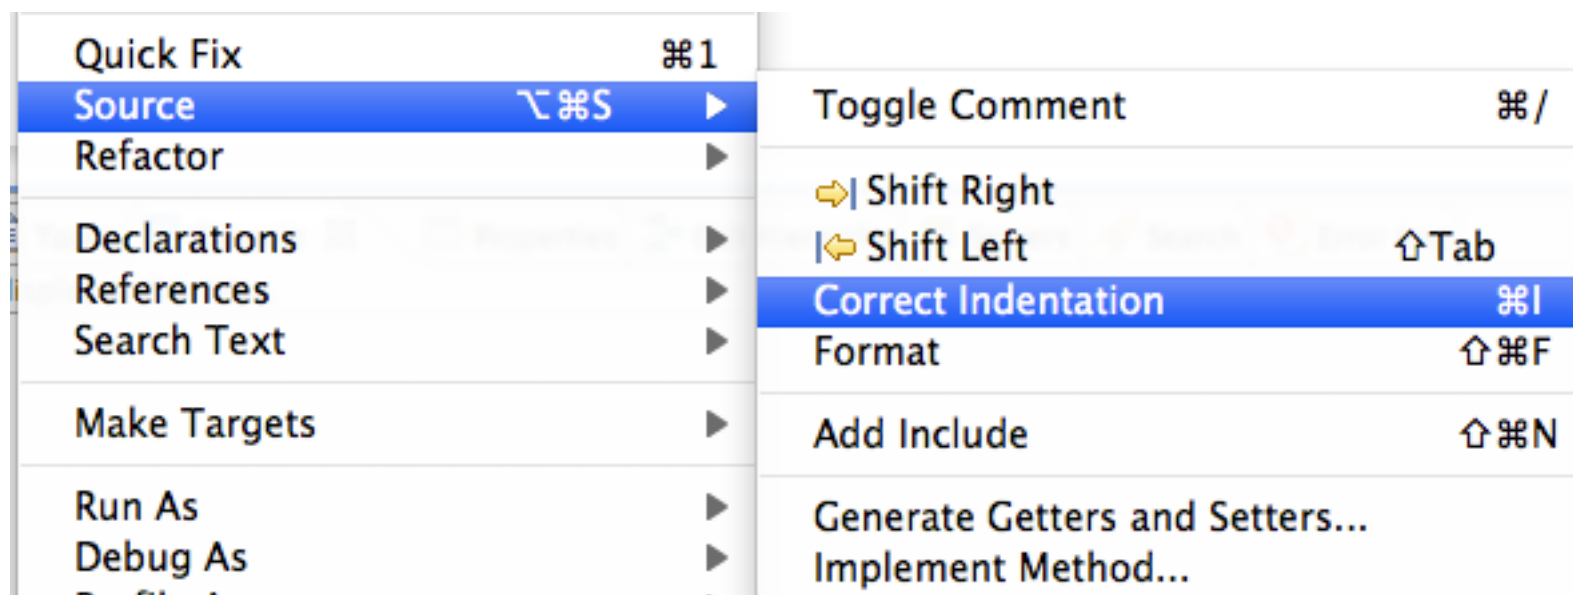



Layout - cont.

- Use only one statement per line, to improve readability / debugging, e.g.:

// NO:

```
if ( p > q ) cout << p;
```

// OK:

```
if ( p > q )  
    cout << p; // notice also the use  
               // of indentation
```



Layout - cont.

- Group lines in “paragraphs” using empty lines
- If there’s need to split a line (some coding standards require a certain length) make it obvious and indent, e.g.:

```
totalBill = shippingCost + customerPurchase[ customerID ] +  
    salesTax;  
drawLine( window.North, window.South, window.East,  
    window.West, currentWidth);
```



Layout - cont.

- Group lines in “paragraphs” using empty lines
- If there’s need to split a line (some coding standards require a certain length) make it obvious and indent, e.g.:

```
totalBill = shippingCost + customerPurchase[ customerID ] +  
    salesTax;  
drawLine( window.North, window.South, window.East,  
    window.West, currentWidth);
```

+ and , signal that
the statement is not
complete



Comments

- Describe code intent, e.g.:

```
// get current employees info
```

instead of

```
// update EmpRec vector
```

- Do not repeat the code, e.g.:

```
delete aVehicle; // free pointer
```



Preprocessor

- Do not use macros except for source control, using `#ifdef` and `#endif`
- macros don't obey scope and type rules and make code hard to read. All that can be done with macros can be done using C++ features
- `#includes` should precede all non-preprocessor declarations
- nobody will notice the `#include` in the middle of a file



Credits

- These slides are (heavily) based on the material of:
- C++ Programming Style Guidelines
Version 4.7, October 2008
Geotechnical Software Services
<http://geosoft.no/development/cppstyle.html>
- “Code Complete”, Steve McConnell,
Microsoft Press
- JSF++ coding guidelines